


MONUMENT RECORD

Corner ID: **Wash_M21**


Section Corner

Sections 27, 28, 33 & 34- T10N-R01W, 2nd P.M.
Washington Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
Found Limestone 0.95' above grade, 0.32' x 0.32' securely in ground with cut "X" recut for clarity.

MONUMENT LOCATION SKETCH:

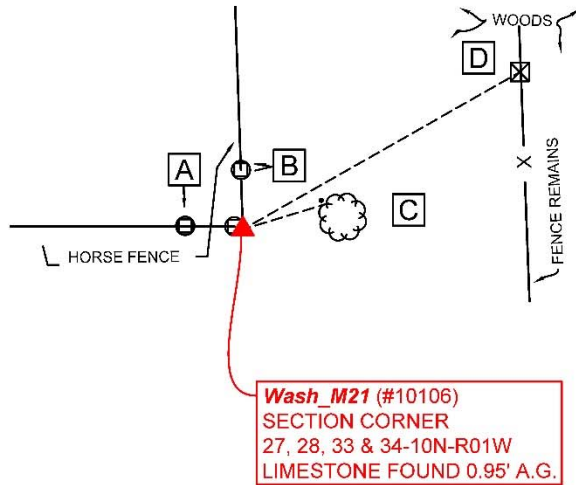

WITNESS MONUMENT TIES

All ties to new Bearing Trees (BTs) are a mag nail set in a 1-1/2" plastic washer stamped "SURVEY MARKER - DO NOT REMOVE" and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail.

ID	BEARING	DISTANCE	DESCRIPTION
Witness A	N 70d W	2.0'	Center peak of a 4" x 8" concrete fence post, with slots securing wood planks and reinforced by steel cable.
Witness B	N 2d W	10.9'	South face and peak of a 4" x 8" concrete fence post, with slots securing wood planks and reinforced by steel cable.
Witness C	N 73d E	18.9'	Mag nail with washer set in hack on northwest side of a 4.13" northern hackberry tree 0.6' above grade.
Witness D	N 60d E	68.9'	Cut "X" in the center of an irregular shaped limestone formation that rests securely in a gorge that ran along a downed woven fence.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **Wash_M21**

Section Corner

Sections 27, 28, 33 & 34- T10N-R01W, 2nd P.M.
Washington Township, Monroe County, Indiana




PHOTO IDENTIFIED: *Photo Date:* 01/18/2022



Photo Orientation & Description: Wash_M21 from above



Photo Orientation & Description: Wash_M21 from south



Photo Orientation & Description: Wash_M21 from west



Photo Orientation & Description: Wash_M21 from east



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us


Page 2 of 3

MONUMENT RECORD

Corner ID: **Wash_M21**

Section Corner

Sections 27, 28, 33 & 34- T10N-R01W, 2nd P.M.
Washington Township, Monroe County, Indiana



ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 1/18/2022 *By:* J.M.G. *Monument Found:* Limestone with cut "X" *BTs or Reference Objects Found:* Found Witnesses B & C from 1998 Monument Record = Witnesses A & B above *Project #:* Washington Monuments *Field Book:* 54/42
Equipment: The basis of bearings is Grid North System NAD83(2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b_conus.db3, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover. Coordinates are available upon request. Distances to witness ties were collected with a Leica Disto laser distance meter and with a measuring tape. Bearings to witness ties were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north and are approximately shown hereon for reference. Priority should be given to provided distances over bearings. *Notes:* All witness photos on file in the Monroe County Surveyors Office.

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

Monument was found east of the intersection of two longstanding concrete posts supported horse fences at the back (north end) of the 281 East Sample Road homestead.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*


The cut "X" was reemphasized for clarity and the functionality of the monument. Geodetic coordinates were captured for the monument and for Witness D

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*

The stone was previously witnessed by the Monroe County Surveyor, Kevin Enright, on November 17, 1998 and accepted by the Monroe County Surveyor Review Board on November 17, 1998. The 1998 Monument Record accepted the stone per a preliminary plat for Kaye-Lee by Douglas Curry. References on File: A 2011 survey for the lands of Raymond Saidah by Michael Sheppard can be found in the Monroe County Surveyor's Office under the survey ID Number of RSID003974 and a Tracy L. McGill survey, Location Route Survey Plat Proposed I-69 Section 5 Segment 4 (2013) on file in the Recorder's Office (2013015455.IN). Historic research has not yet been performed to prove the validity of this monument.

CERTIFICATION:




Date: 02/22/2022
Trohn Enright-Randolph
Monroe County Surveyor



Date: 02/22/2022
Accepted by the
Monroe County Survey Review Board



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 3 of 3

MONUMENT RECORD


Corner I.D. #
WASHINGTON
M - 21

STATE OF INDIANA - COUNTY OF MONROE

Section 33, Township 10 NORTH, Range 1 WEST

Monument Description & Remarks: LIMESTONE WITH "+"

Recovery Tie Drawing

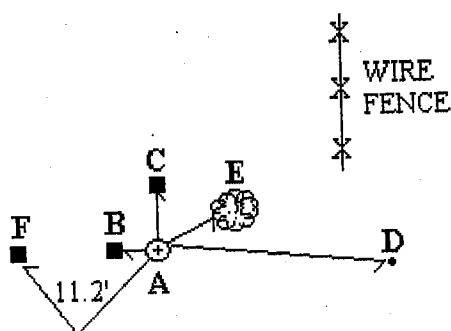

- A. LIMESTONE WITH "+"
- B. 4"x8" CONCRETE POST N72°W, DIST 1.98'
- C. 4"x8" CONCRETE POST N02°W, DIST 10.45'
- D. 1 1/4" IRON PIPE-13' AG S86°E, DIST 87.25'
- E. 36" DEAD MAPLE N65°E, DIST 6.95'
- F. 4"x8" CONCRETE POST N74°W, DIST 11.2'

● At Corner



Not To Scale

State of Indiana

County of MONROE

I, STEVEN V. FARKAS, hereby certify that this document was prepared under my direction in accordance with the provisions of Section 17-3-64-4 through 17-3-64-8 of the Indiana Code, being Acts of 1965, Chapter 319; and the above data is given under my hand and seal this _____ day of _____, 20____ A.D.

Space
Reserved For
Recording
Officer

Indiana Registered Land Surveyor No. _____ or

United States Government Agency _____

Title _____

Field Book:

Page:

MONUMENT RECORD
State of Indiana - County of Monroe

Section: 33

Township: 10 North

Range: 1 West

Corner ID: Wash M-21


Monument Description & Remarks: Found tapered Limestone with "+" at NE corner of section. Limestone measured 0.95' x 0.32' x 0.32' out of ground. Survey marker set 3' up on tree, 1' North of stone.

References on file in the County Surveyor's Office: Preliminary Plat for Kaye-Lee Subdivision prepared by Douglas Curry RLS No. 890006.

RECOVERY TIE DRAWING

Field Book 98-02 Page No. 35

USGS Modesto Quad

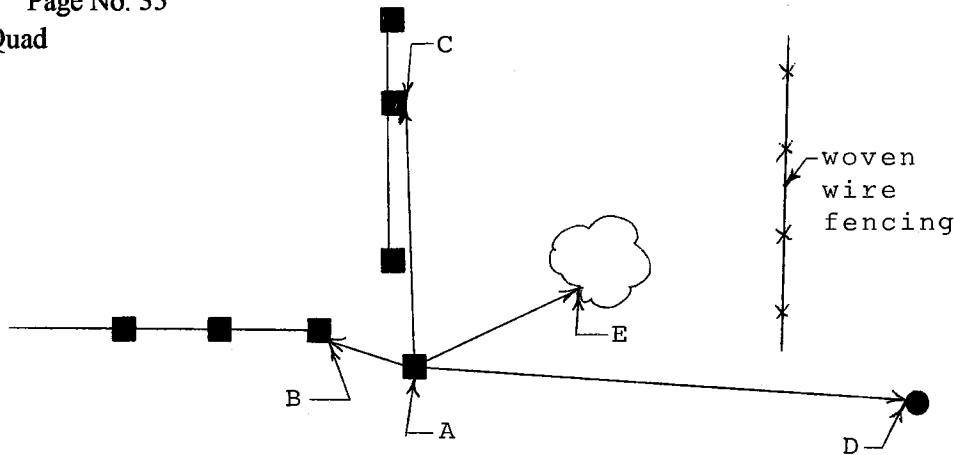

A - Limestone with "+"

B - North 72° West, 1.98' from stone
Chisled "+" in 4" x 8" concrete post

C - North 02° West, 10.45' from stone
Chisled "+" in 4" x 8" concrete post

D - South 86° East, 87.25' from stone
1 1/4" o.d. iron pipe. 1.3' out of ground

E - North 65° East, 6.95' from stone
36" dead Maple

Not To Scale

Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of Section 30, Article 10 of the Indiana Code; and the above data is given under my hand and seal this 17th day of November, 1998.

Kevin P. Enright



Administered by Surveyor Review Board

